




Polycrystalline Module

Dimensions : 992*1956*35mm

Poly Power : 330W

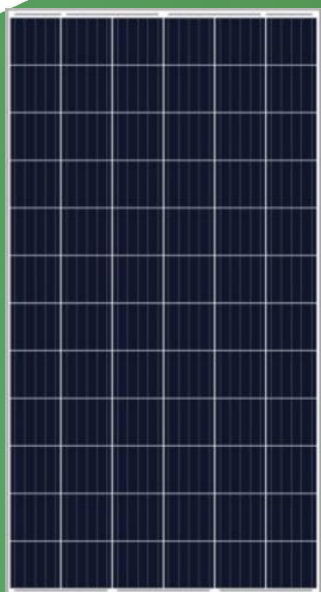

330W

Max power output

17.0%

Max Efficiency

±3%

Positive Power Tolerance


SUNWORTH - Your Trusted Brand of High Quality

- Professional crystalline silicon photovoltaic module manufacturer.
- Fully automated production line with leading photovoltaic technology.
- Adopt strict international standard quality management system ISO 9001:2015, ISO14001: 2015.
- Passed variety of harsh environmental tests (salt spray, ammonia and sand storm corrosion test IEC61730-2:2016, IEC61215:2016).
- Twice EL test to ensure the reliability of the solar modules.

Linear Performance Warranty

10 years Product Warranty

25 years Linear Power Warranty

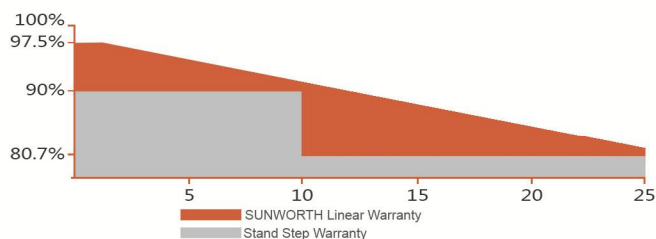

5 Bus Bar Solar Cells

5 BB solar cells, improve the modules' efficiency ,and contributed a better aesthetic appearance



High Efficiency

High efficiency solar cells to keep the module efficiency reach to 17.0%



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production



Severe Weather Resilience

2400 Pa wind load
5400 Pa snow load



100% EL Testing

100% EL detection before and after lamination

Dimensions: 992*1956*35mm
Poly Power: 330W

Electrical Characteristics

Model No.	SW330P-72
Maximum Power (Pmax)	330W
Max-power Voltage (Vmp)	37.76V
Max-power Current (Imp)	8.74A
Open-circuit Voltage (Voc)	46.14V
Short-circuit Current (Isc)	9.17A
Module Efficiency	17.0%
Operating Temperature	-40℃~+85℃
Maximum System Voltage	1000Vdc
Maximum Series Fuse Rating	15A
Power Tolerance	±3%

*STC condition: 1000 W/m², 1.5AM and 25℃ cell temperature

Temperature Characteristics

NMOT	46℃±2℃
Temperature Co-efficient of Pmax	-0.398%/℃
Temperature Co-efficient of Voc	-0.340%/℃
Temperature Co-efficient of Isc	0.0576%/℃


Mechanical Characteristics

Mono Power	330W
Cell Type	Poly 157*157mm
Cell Arrangement	72(6*12)
Dimensions	992*1956*35mm
Weight	20.5kg
Front Cover	3.2mm tempered glass
Frame Material	Anodized aluminium alloy
Junction Box	IP67 rated
Output Cables	4mm ² , Length 900mm+MC4


Packing

Packing	20'GP	40'HC
Pieces per Carton	30	30
Pieces/container	300	704

Module Size

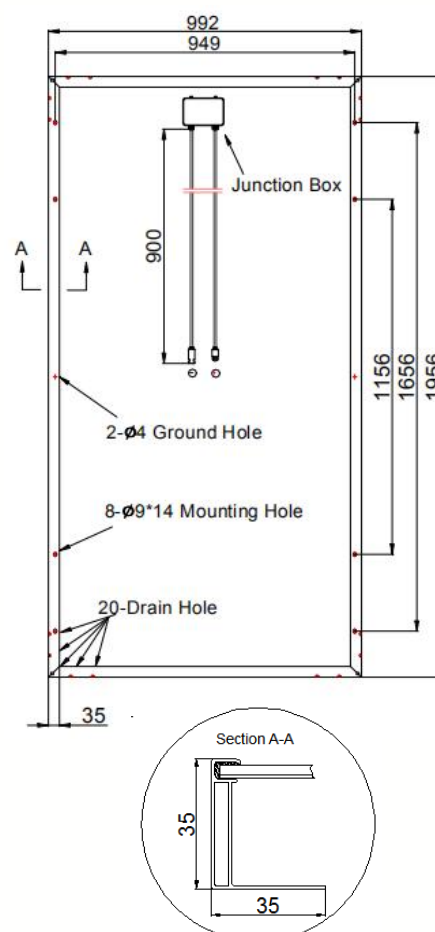

I-V Curve

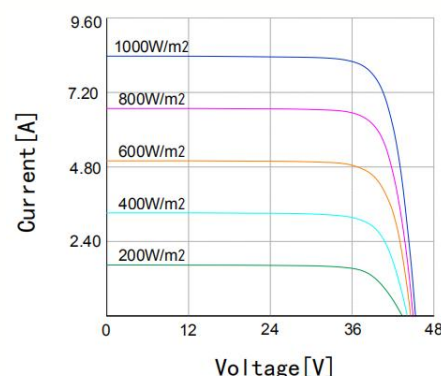

SUNWORTH solar modules have superior performance under low solar irradiation condition (200W/ m² (AM1.5, 25 °C)

Website: www.sunworthsolar.com